


Sommario



To activate the internal termination resistance see paragraph [Setup Termination resistances](#)

Communication speed	125, 250, 500, 1000 Kbit/s
Max. number of Drivers/Receivers on the line	100
Max. cable lengths	500m @ 125Kbit/s, 250m @ 250Kbit/s, 100m @ 500Kbit/s, 25m @ 1000Kbit/s
Input impedance	>15Kohm
Short-circuit current limit	45mA

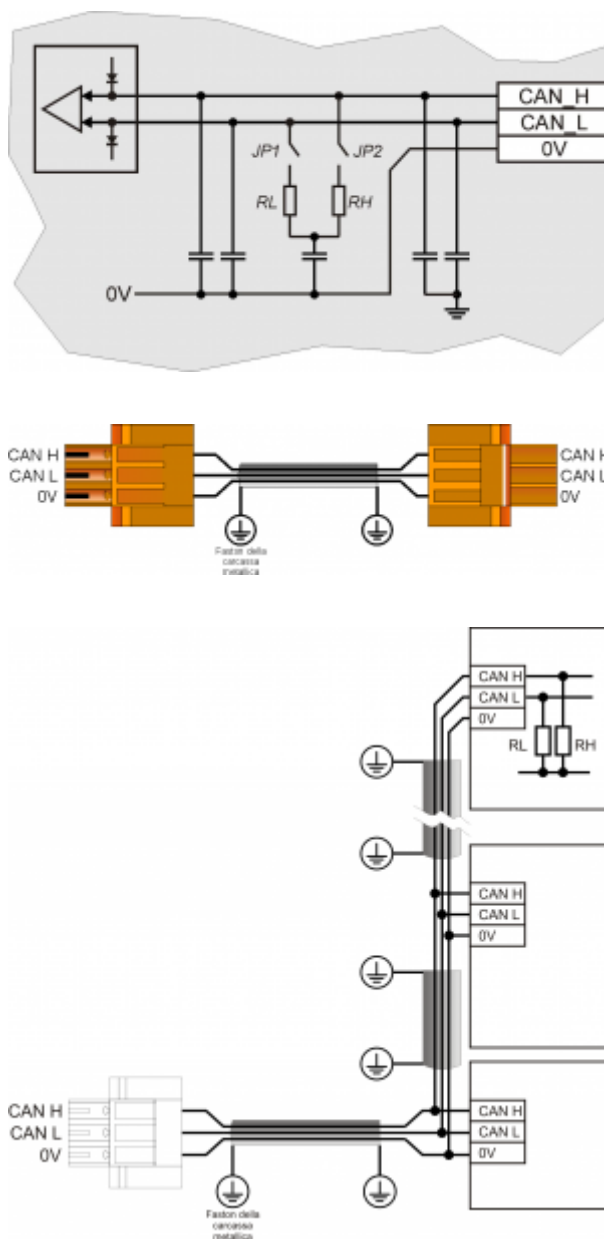

CAN BUS connection examples.



Caution:
Close DIP's JP1 and JP2 and insert the termination resistances (RL, RH) on the last device of the chain.

Documento generato automaticamente da **Qem Wiki** - <https://wiki.qem.it/>

Il contenuto wiki è costantemente aggiornato dal team di sviluppo, è quindi possibile che la versione online contenga informazioni più recenti di questo documento.