


## 目录





To activate the internal termination resistance see section [Terminating resistors setting CAN1 and CAN2 PORT](#)

<b>Communication speed</b>	125, 250, 500, 1000 Kbit/s
<b>Maximum numr of Drivers/Receiver on the line</b>	100
<b>Maximum cable length</b>	500m @ 125Kbit/s, 250m @ 250Kbit/s, 100m @ 500Kbit/s, 25m @ 1000Kbit/s
<b>Input impedance</b>	>15Kohm
<b>Short circuit current limit</b>	45mA

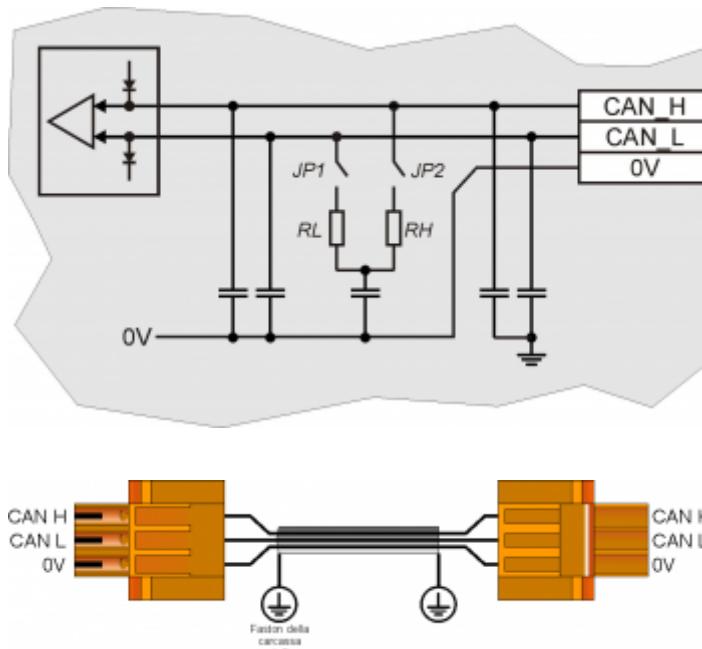

**On the first and last device, must be insert the termination resistance.**

Documento generato automaticamente da **Qem Wiki** - <https://wiki.qem.it/>

Il contenuto wiki è costantemente aggiornato dal team di sviluppo, è quindi possibile che la versione online contenga informazioni più recenti di questo documento.