


Sommario



To activate the internal termination resistance see section [Terminating resistors setting CAN1 and CAN2 PORT](#)

Communication speed	125, 250, 500, 1000 Kbit/s
Maximum numr of Drivers/Receiver on the line	100
Maximum cable length	500m @ 125Kbit/s, 250m @ 250Kbit/s, 100m @ 500Kbit/s, 25m @ 1000Kbit/s
Input impedance	>15Kohm
Short circuit current limit	45mA

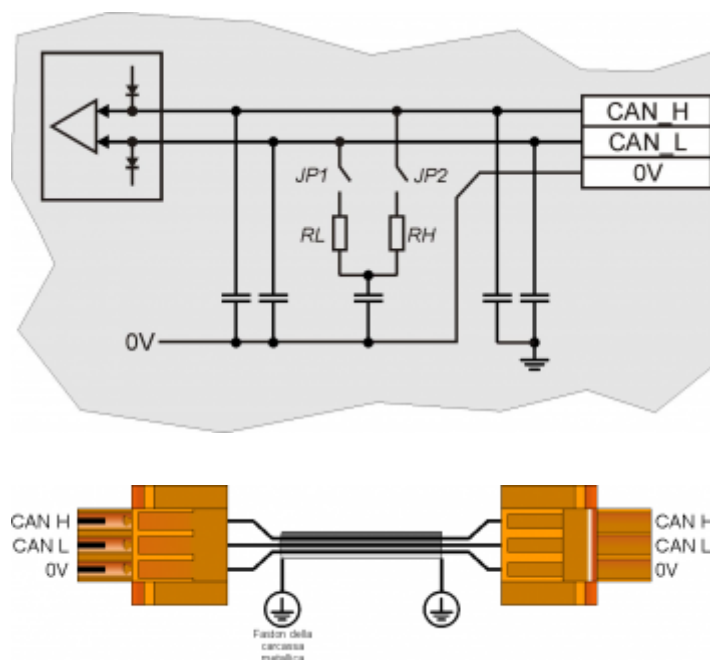

On the first and last device, must be insert the termination resistance.

Documento generato automaticamente da **Qem Wiki** - <http://wiki.qem.it/>

Il contenuto wiki è costantemente aggiornato dal team di sviluppo, è quindi possibile che la versione online contenga informazioni più recenti di questo documento.