


Sommario



To activate the internal termination resistance see paragraph [Setup of USER PORT electric standard](#), [Setup of AUX1 PORT electric standard](#) or [Setup of AUX2 PORT polarization and termination resistances](#)

Communication speed	4800 baud (only if used with SERCOM and/or MODBUS device), 9600 baud, 19200 baud, 38400 baud, 57600 baud
Communication mode	Half duplex
Operating mode	Differential
Max. number of devices connected on the line	32
Max. cable length	1200 m
Input impedance	$\geq 12 \text{ Kohm}$
Short-circuit current limit	35 mA

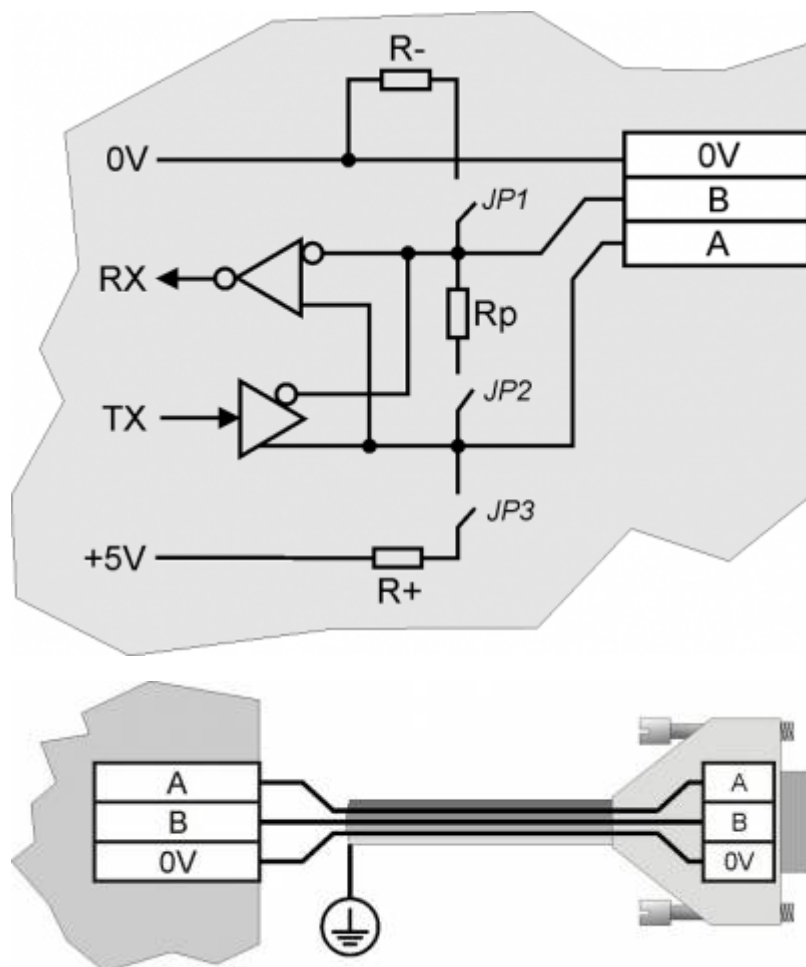

Documento generato automaticamente da **Qem Wiki** - <https://wiki.qem.it/>

Il contenuto wiki è costantemente aggiornato dal team di sviluppo, è quindi possibile che la versione online contenga informazioni più recenti di questo documento.