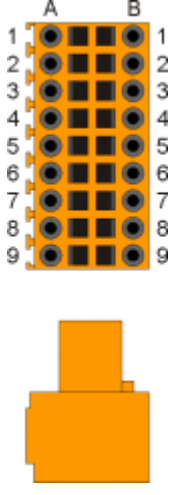


Sommario

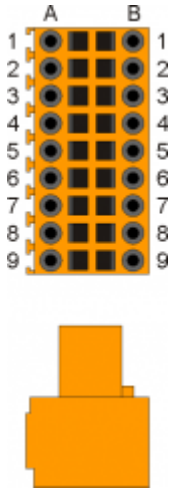
Composizione bus gamma CA	3
SLOT 3 (H1-CC4)	3
SLOT 4 (H1-CC4)	3
SLOT 5 (H1-G12)	3
SLOT 6 (H1-I16)	4
SLOT 7 (H1-P16)	4

Composizione bus gamma CA

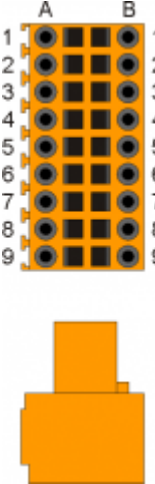
SLOT 3 (H1-CC4)

	Pin	Nome Name	Descrizione Description	Indirizzo Address
	1A	+24V	OUT 24Volt	
	1B	0V		
	2A	PHA1	"A" channel bidirectional counter 1	X.CNT01 \ X.INP07
	3A	PHB1	"B" channel bidirectional counter 1	X.CNT01 \ X.INP08
	4A	PHZ1	"Z" channel bidirectional counter 1	X.INP09
	5A	PHA2	"A" channel bidirectional counter 2	X.CNT02 \ X.INP10
	6A	PHB2	"B" channel bidirectional counter 2	X.CNT02 \ X.INP11
	7A	PHZ2	"Z" channel bidirectional counter 2	X.INP12
	2B	PHA1	"A" channel bidirectional counter 3	X.CNT03 \ X.INP13
	3B	PHB1	"B" channel bidirectional counter 3	X.CNT03 \ X.INP14
	5B	PHA2	"A" channel bidirectional counter 4	X.CNT04 \ X.INP15
	6B	PHB2	"B" channel bidirectional counter 4	X.CNT04 \ X.INP16
	8A	I1	Digital input I1	X.INP01
	9A	I2	Digital input I2	X.INP02
	8B	I3	Digital input I3	X.INP03
	9B	I4	Digital input I4	X.INP04
4B	I5	Digital input I5	X.INP05	
7B	I6	Digital input I6	X.INP06	

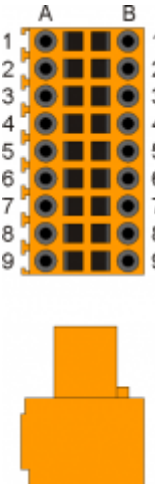
SLOT 4 (H1-CC4)

	Pin	Nome Name	Descrizione Description	Indirizzo Address
	1A	+24V	OUT 24Volt	
	1B	0V		
	2A	PHA1	"A" channel bidirectional counter 1	X.CNT05 \ X.INP23
	3A	PHB1	"B" channel bidirectional counter 1	X.CNT05 \ X.INP24
	4A	PHZ1	"Z" channel bidirectional counter 1	X.INP25
	5A	PHA2	"A" channel bidirectional counter 2	X.CNT06 \ X.INP26
	6A	PHB2	"B" channel bidirectional counter 2	X.CNT06 \ X.INP27
	7A	PHZ2	"Z" channel bidirectional counter 2	X.INP28
	2B	PHA1	"A" channel bidirectional counter 3	X.CNT07 \ X.INP29
	3B	PHB1	"B" channel bidirectional counter 3	X.CNT07 \ X.INP30
	5B	PHA2	"A" channel bidirectional counter 4	X.CNT08 \ X.INP31
	6B	PHB2	"B" channel bidirectional counter 4	X.CNT08 \ X.INP32
	8A	I1	Digital input I1	X.INP17
	9A	I2	Digital input I2	X.INP18
	8B	I3	Digital input I3	X.INP19
	9B	I4	Digital input I4	X.INP20
4B	I5	Digital input I5	X.INP21	
7B	I6	Digital input I6	X.INP22	

SLOT 5 (H1-G12)

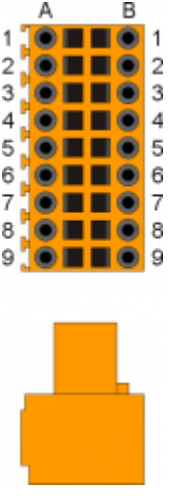
	Pin	Nome Name	Descrizione Description	Indirizzo Address
	1A	+24V	OUT 24Volt	
	1B	0V		
	2A	O1	Digital output 1	X.OUT01
	2B	O2	Digital output 2	X.OUT02
	3A	O3	Digital output 3	X.OUT03
	3B	I1	Digital input I1	X.INP33
	4A	I2	Digital input I2	X.INP34
	4B	I3	Digital input I3	X.INP35
	5A	GA0	Analog output 0V	
	5B	AO1	Analog output 1	X.AN01
	6A			
	6B			
	7A	AI1	Analog input 1	X.AI01
	7B	AI2	Analog input 2	X.AI02
	8A	AI3	Analog input 3	X.AI03
	8B	VP	Reference output for potentiometer	
	9A	GAI	Analog input 0V	
	9B			

SLOT 6 (H1-I16)

	Pin	Nome Name	Descrizione Description	Indirizzo Address
	1A	+24V	Out 24 Volt	
	1B	0V		
	2A	I1	Digital input 1	X.INP36
	3A	I2	Digital input 2	X.INP37
	4A	I3	Digital input 3	X.INP38
	5A	I4	Digital input 4	X.INP39
	6A	I5	Digital input 5	X.INP40
	7A	I6	Digital input 6	X.INP41
	8A	I7	Digital input 7	X.INP42
	9A	I8	Digital input 8	X.INP43
	2B	I9	Digital input 9	X.INP44
	3B	I10	Digital input 10	X.INP45
	4B	I11	Digital input 11	X.INP46
	5B	I12	Digital input 12	X.INP47
	6B	I13	Digital input 13	X.INP48
	7B	I14	Digital input 14	X.INP49
	8B	I15	Digital input 15	X.INP50
	9B	I16	Digital input 16	X.INP51

SLOT 7 (H1-P16)

	Pin	Nome Name	Descrizione Description	Indirizzo Address
--	-----	-----------	-------------------------	-------------------

	Pin	Nome Name	Descrizione Description	Indirizzo Address	
	1A	O1	Digital output 1	X.OUT04	
	2A	O2	Digital output 2	X.OUT05	
	3A	O3	Digital output 3	X.OUT06	
	4A	O4	Digital output 4	X.OUT07	
	5A	O5	Digital output 5	X.OUT08	
	6A	O6	Digital output 6	X.OUT09	
	7A	O7	Digital output 7	X.OUT10	
	8A	O8	Digital output 8	X.OUT11	
	1B	O9	Digital output 9	X.OUT12	
	2B	O10	Digital output 10	X.OUT13	
	3B	O11	Digital output 11	X.OUT14	
	4B	O12	Digital output 12	X.OUT15	
	5B	O13	Digital output 13	X.OUT16	
	6B	O14	Digital output 14	X.OUT17	
	7B	O15	Digital output 15	X.OUT18	
	8B	O16	Digital output 16	X.OUT19	
	9A	COM1	Digital output 1-8 common voltage (12÷28 dc volts)		
	9B	COM2	Digital output 9-16 common voltage (12÷28 dc volts)		

Documento generato automaticamente da **Qem Wiki** - <https://wiki.qem.it/>

Il contenuto wiki è costantemente aggiornato dal team di sviluppo, è quindi possibile che la versione online contenga informazioni più recenti di questo documento.