Sommario

AN034 - Application update procedure with MMC for J1-P20 3
Premise 4
Procedure 4

AN034 - Application update procedure with MMC for J1-P20

Document:	**AN030**
Description:	Application update procedure with MMC for J1-P20
Editor:	Riccardo Furlato
Approver	Gabriele Bazzi
Link:	http://www.qem.eu/doku/doku.php/appnote/an034
Language:	English

Document Release	Description	Note	Date
01	New manual		27/01/2020

Premise

Before switching to the application update from MMC there are some premises to be respected:

- The MMC must be formatted with a filesystem type FAT12, FAT16 or FAT32;
- Before copying the files to the MMC, it is recommended that you format it.
- The file must be named as: `appqtp.bin`

Procedure

1. Turn off the instrument.
2. Insert the MMC/SD as shown on the screen in the picture (the MMC remains protruding).

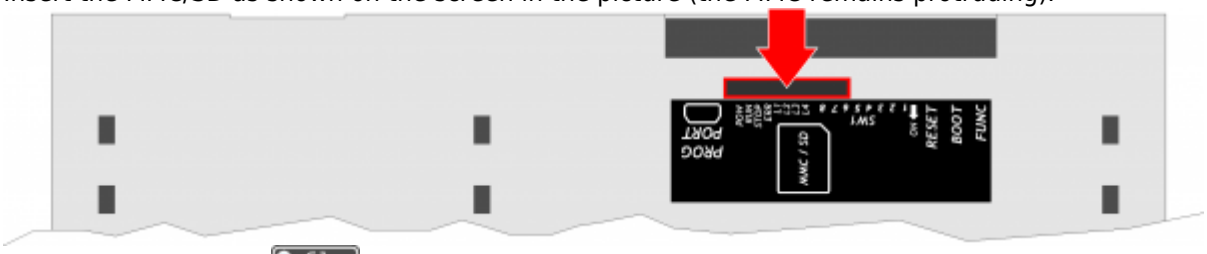

3. Press and hold the **F1**

button to access the **SYSTEM FUNCTIONS**.
4. Turn on the instrument.
5. Press the **F1**

button until the following screen appears

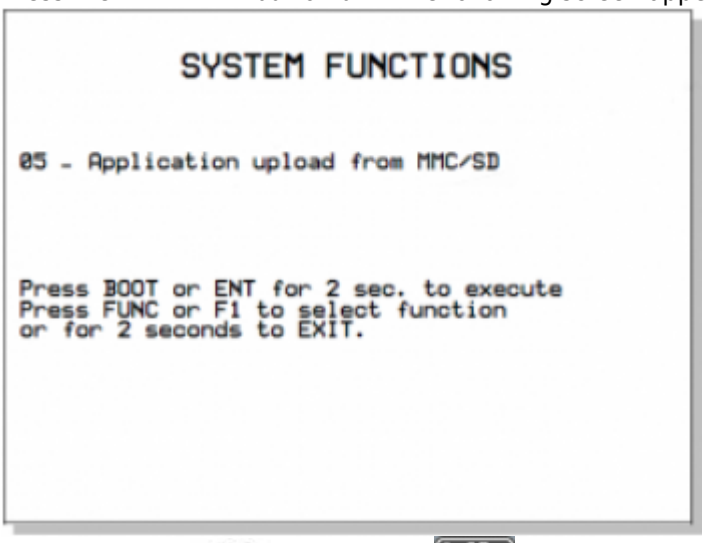

6. Press the **BOOT** button or **F2**

button for 2 seconds to execute the selected function.
7. The following screen appears to indicate that the operation is in progress

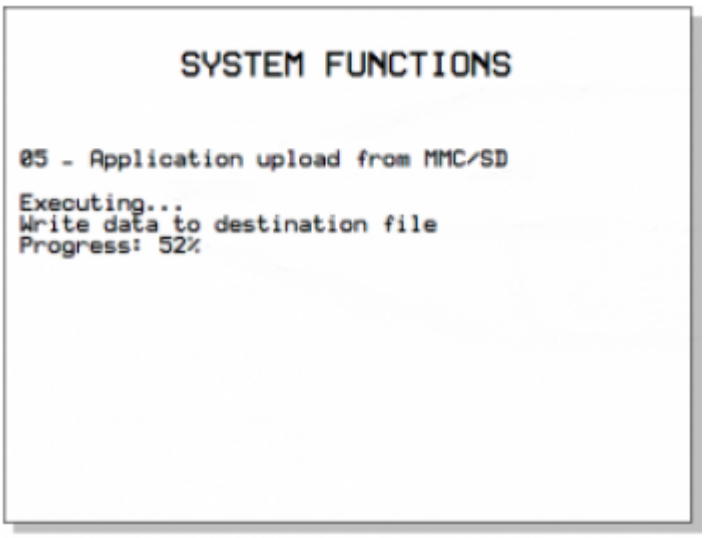

8. A successful operation pops up the message SUCCESSFUL to indicate that the operation is successful.
9. If the function fails, the **POW** LED will be switched off and starts flashing the **ERR** LED.

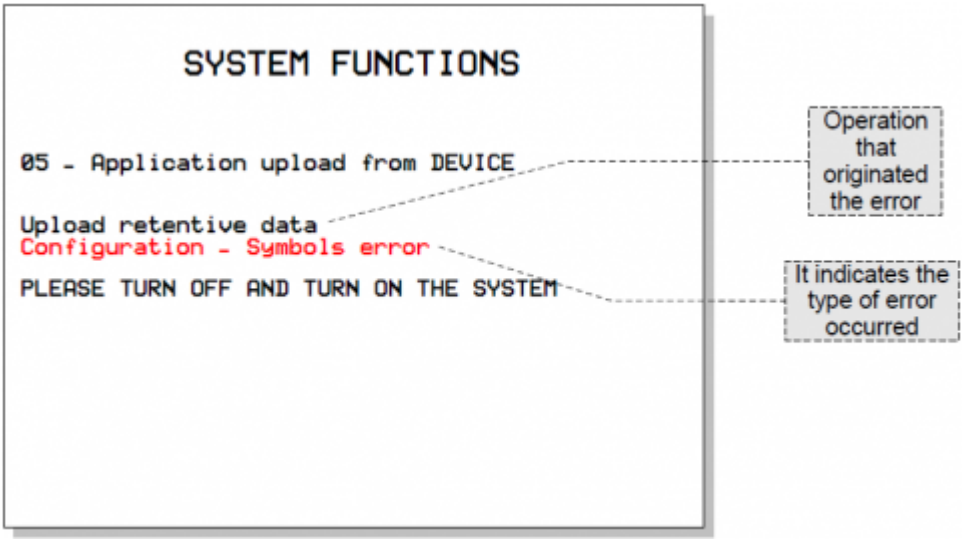

N.B.: In this case, repeat the procedure carefully from the beginning and if necessary, contact the Assistance.

10. Press the **F1** button to restart the system.

Documento generato automaticamente da **Qem Wiki** - https://wiki.qem.it/
Il contenuto wiki è costantemente aggiornato dal team di sviluppo, è quindi possibile che la versione online contenga informazioni più recenti di questo documento.