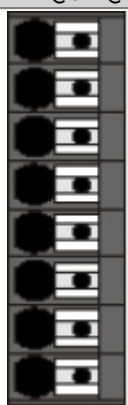




Sommario

Connector

@cnn@	Terminal	Symbol	Description	Address
	1	AI2_C	Analog input 2	@slot@.AI02
	2	AI2_B		
	3	AI2_A		
	4	AI1_C	Analog input 1	@slot@.AI01
	5	AI1_B		
	6	AI1_A		
	7	VREF	Reference voltage ¹⁾	
	8	GAI	Common	

¹⁾ For potentiometers

Analog inputs setting

	Num. Dip	Analog input 1					Analog input 2				
		PT100	Thermocouple	Pot.	0-10V	0-20mA	PT100	Thermocouple	Pot.	0-10V	0-20mA
 @dipb@ OFF ↔ ON	1	ON	X	OFF	OFF	OFF	X	X	X	X	X
	2	OFF	X	ON	ON	ON	X	X	X	X	X
	3	X	X	X	X	X	ON	X	OFF	OFF	OFF
	4	X	X	X	X	X	OFF	X	ON	ON	ON
	5	ON	ON	OFF	OFF	OFF	X	X	X	X	X
	6	OFF	OFF	ON	ON	ON	X	X	X	X	X
	7	OFF	ON	X	X	X	X	X	X	X	X
	8	X	X	X	X	X	OFF	ON	X	X	X
 @dipa@ OFF ↔ ON	1	X	X	OFF	OFF	ON	X	X	X	X	X
	2	X	X	OFF	ON	OFF	X	X	X	X	X
	3	X	X	X	X	X	X	X	OFF	OFF	ON
	4	X	X	X	X	X	X	X	OFF	ON	OFF

X = irrelevant setting

Pot. = potentiometric type input

Documento generato automaticamente da **Qem Wiki** - <https://wiki.qem.it/>

Il contenuto wiki è costantemente aggiornato dal team di sviluppo, è quindi possibile che la versione online contenga informazioni più recenti di questo documento.