


Table of Contents

IQ013	3
0.1 Kit contents	3
0.2 Technical features	3
0.3 Electrical features	3

IQ013

Kit opto-insulated serial interface RS232→TTL-3V3.

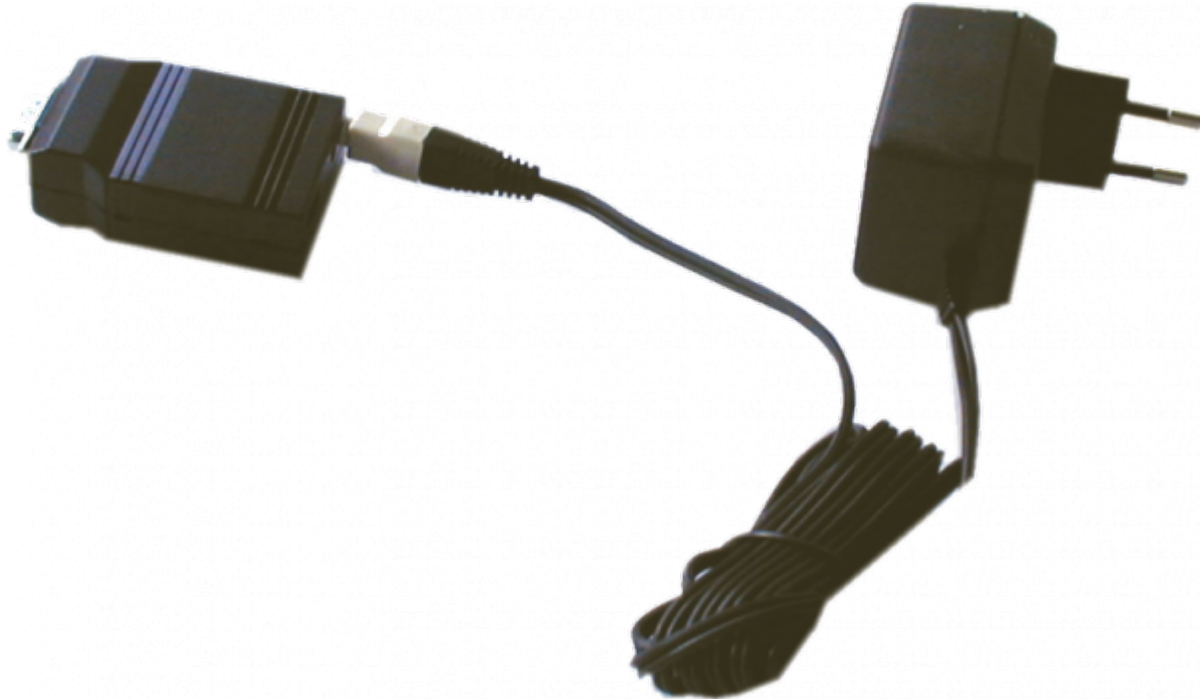


Allows you to connect QEM devices of the Qmove+ series to the PC or modem, with RS232 serial port.

0.1 Kit contents

- n.1 IQ013 interface
- n.1 230Vac⇒12Vdc 150mA power supply
- n.1 Power supply adapter
- n.1 USB mini-B⇒USB mini-B cable L=3mt

0.2 Technical features

Dimensions (mm)	71 x 44 x 24mm
Box material	ABS
Operating temperature	0 ÷ 50°C
Relative humidity	90% without condensation
Altitude	0 - 2000m s.l.m.
Transport and storage temperature	-25 ÷ +70°C
Front panel protection	IP50

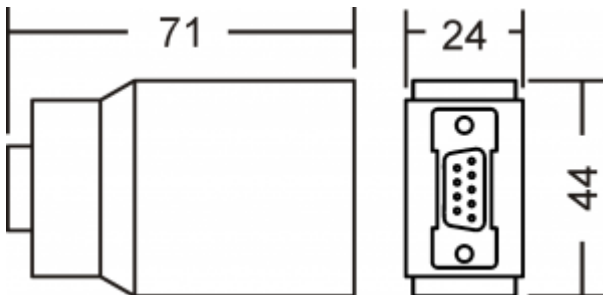

0.3 Electrical features

Electric insulation	15000V
Connectors	
PC side	Qmove side
D-SUB 09F	USB mini-B

Connectors	
PC side	Qmove side
	
1-n.c. 2-RX 3-TX 4-n.c. 5-GND 6-n.c. 7-n.c. 8-n.c. 9-n.c.	1-TX_TTL 2-n.c. 3-n.c. 4-RX_TTL 5-GND

Documento generato automaticamente da **Qem Wiki** - <https://wiki.qem.it/>

Il contenuto wiki è costantemente aggiornato dal team di sviluppo, è quindi possibile che la versione online contenga informazioni più recenti di questo documento.